




TELTONIKA DESKPHONE CONTROL TOOL


User Manual

INDEX

INSTALLING TELTONIKA DESKPHONE CONTROL TOOL.....	3
UNINSTALLING TELTONIKA DESKPHONE CONTROL TOOL.....	6
DESKPHONE CONTROL TOOL INTRODUCTION.....	8
INTERNET SERVICE.....	9
SMS SERVICE.....	10
CONTACTS.....	13
SETTINGS.....	12
FAQS.....	15

INSTALLING TELTONIKA DESKPHONE CONTROL TOOL


1. Plug in USB cable to Deskphone and PC.
2. Go to My Computer, after several seconds you should see the drive named  Teltonika Deskphone (1:)
If drive haven't appeared unplug and plug USB cable. If this did not help restart your PC.
3. Double click on the icon. Choose language and press OK:

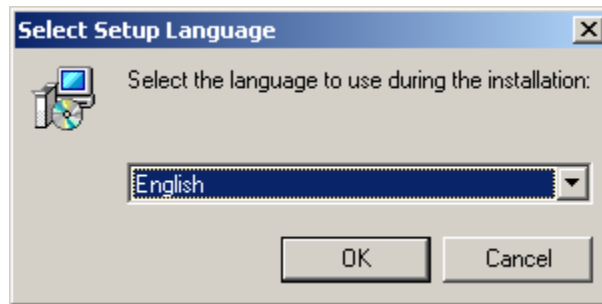


4. In the Welcome window press Next:




5. Then choose installation folder by pressing Browse or just press Next:

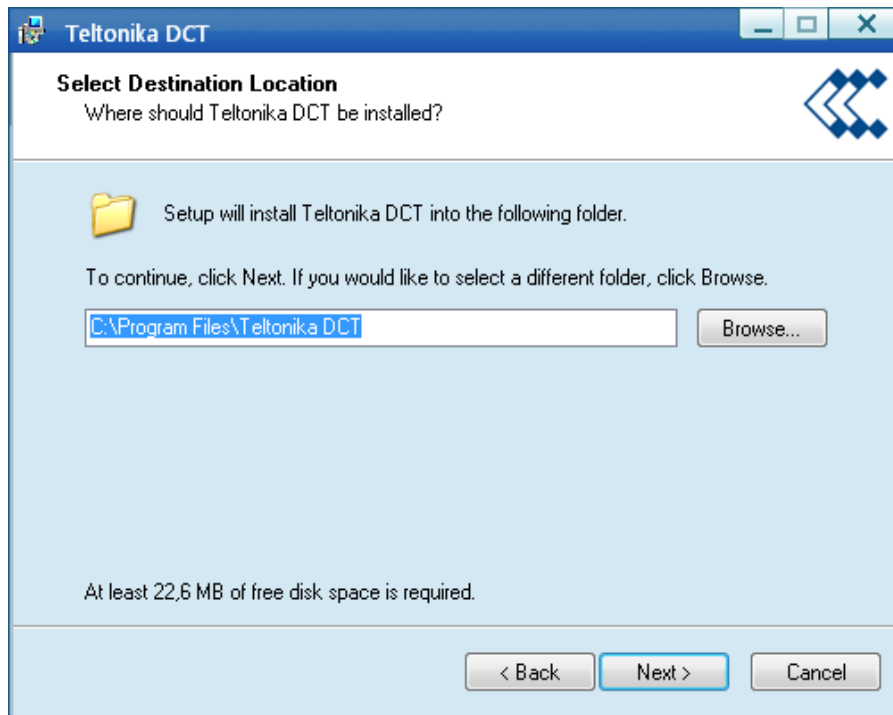


6. Select checkbox if needed or just press Next:

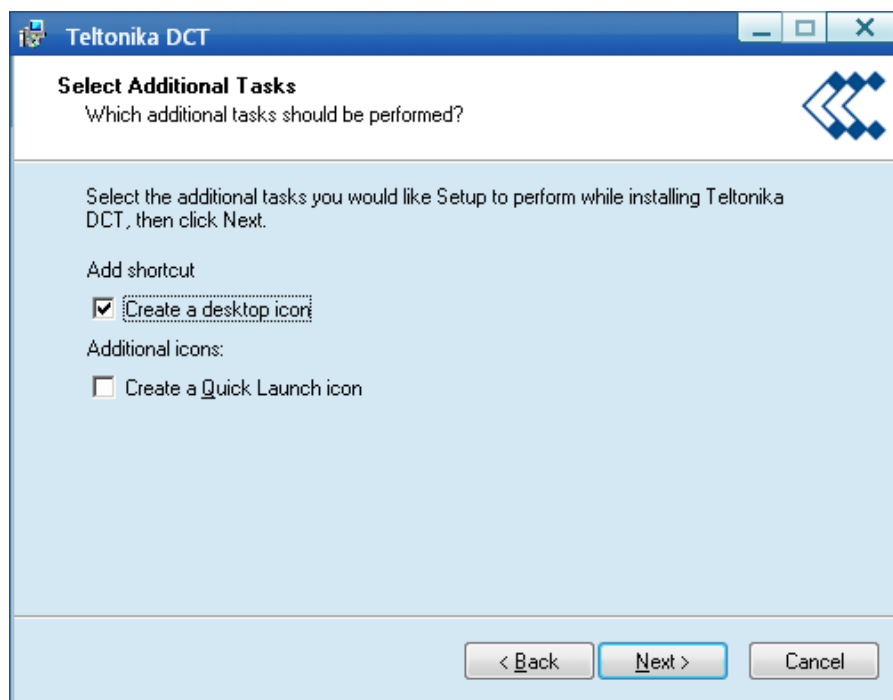


7. Press Install:

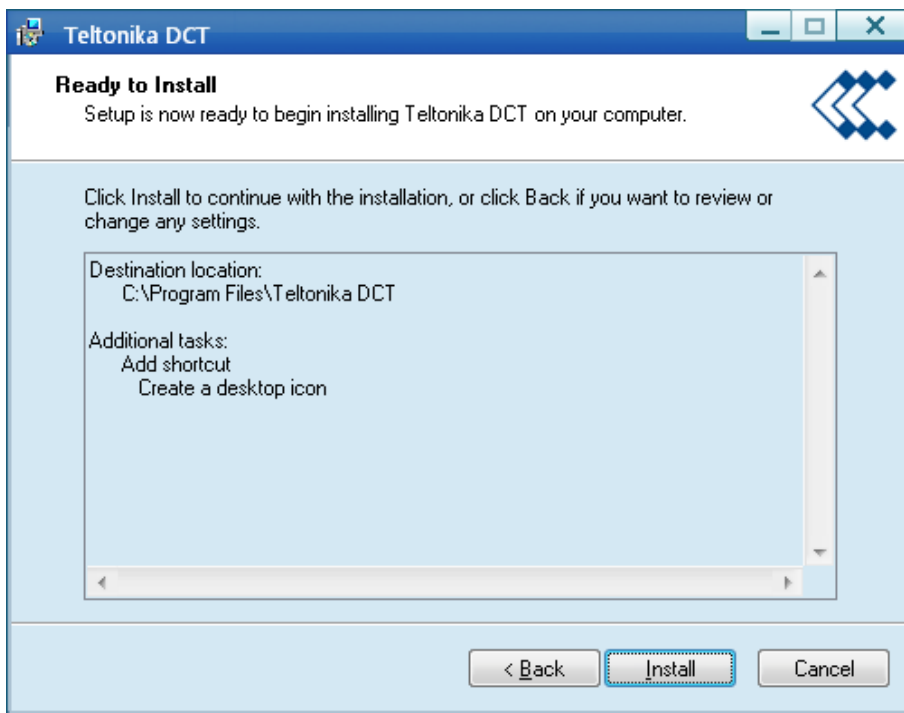

8. Wait till installation progress will finish:

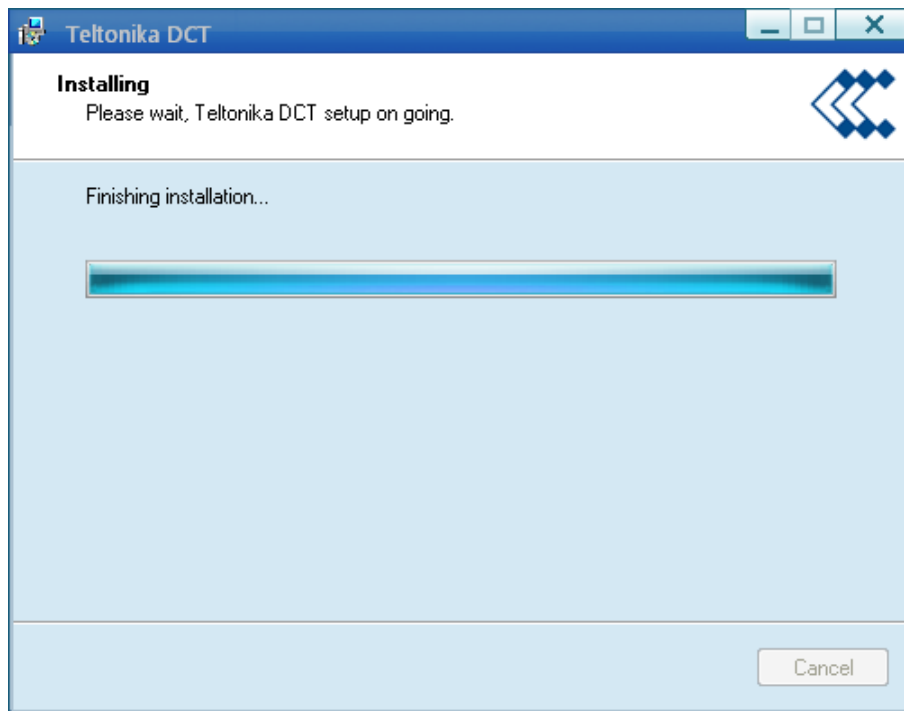


9. Press Finish:

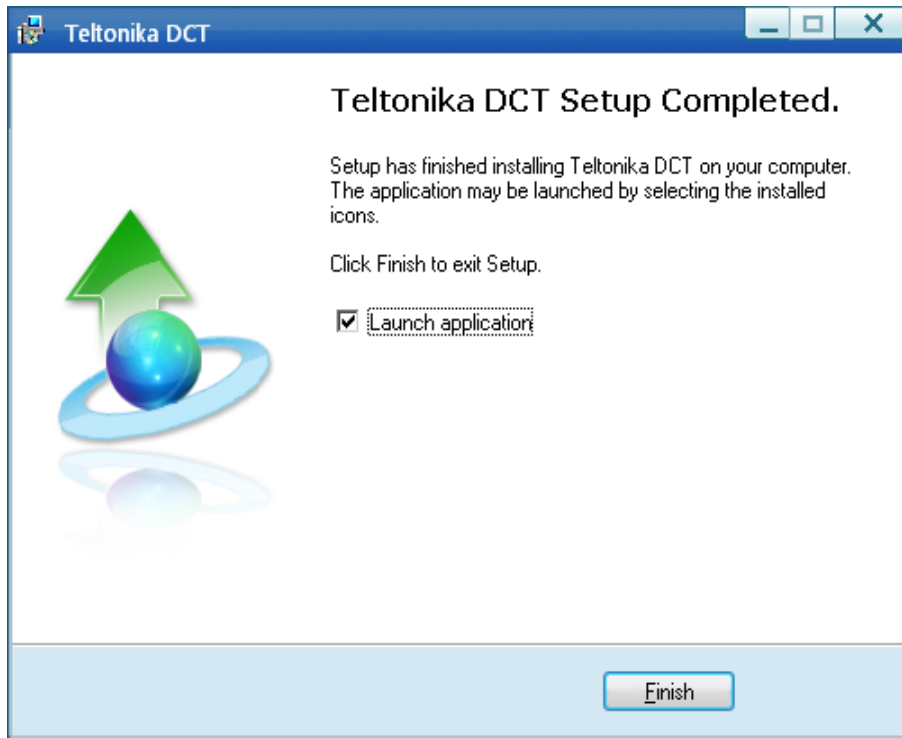


UNINSTALLING TELTONIKA DESKPHONE CONTROL TOOL

1. Go to Start/Programs/Teltonika DCT and choose Teltonika DCT Uninstall.
2. In the appeared window press Yes:

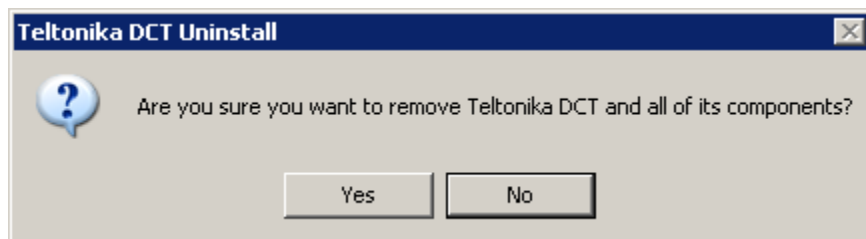


3. Press OK:

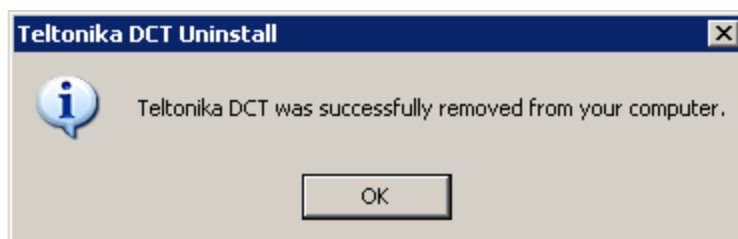

DESCPHONE CONTROL TOOL INTRODUCTION

1. To launch the “Teltonika DCT”, double click the shortcut on the desktop. It should be noted that:
 - If the PIN code enabled, enter the correct one, then click **OK**. The (U)SIM will be locked after 3 retries of incorrect PIN code input;
 - Enter the correct PUK to retrieve the default PIN code. After 10 retries of incorrect PUK code input, please contact with your service provider;
 - With the wrong PIN and PUK, all the network services are unavailable.
2. Main interface introduction:

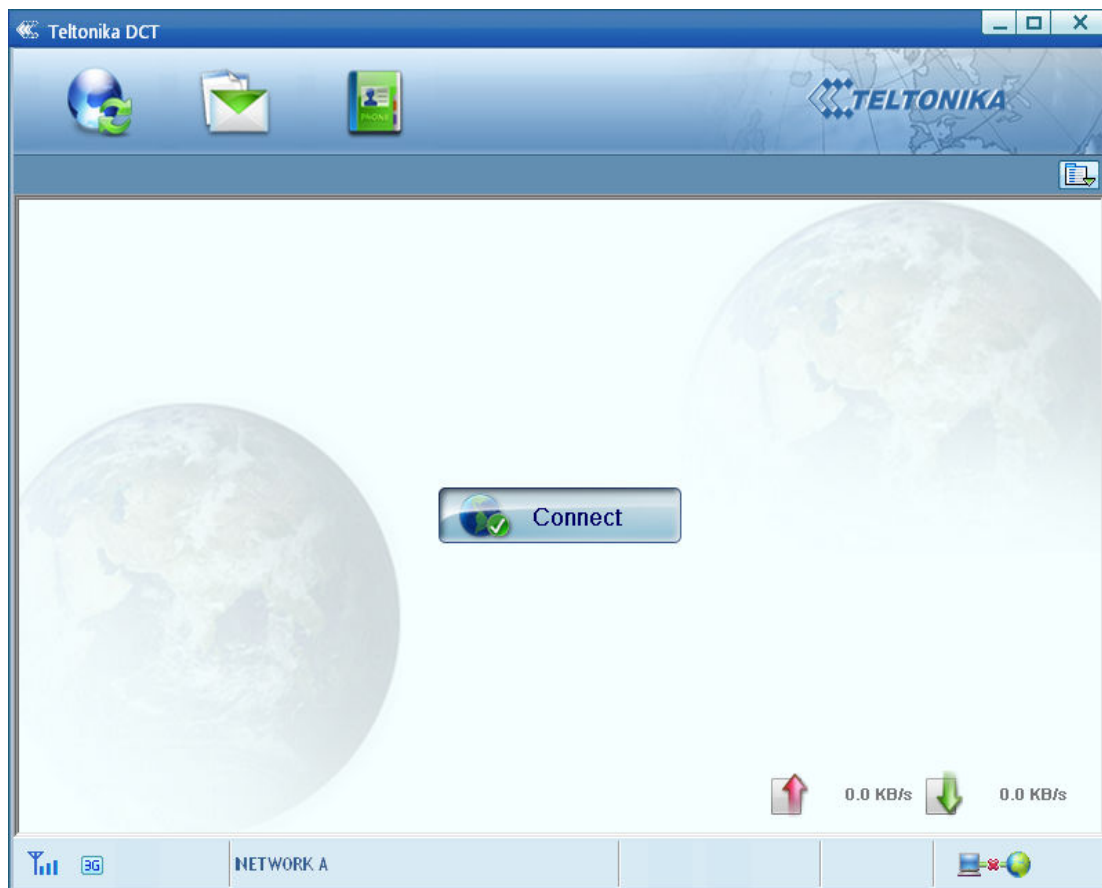

Teltonika DCT main window



Connect /disconnect to the internet



Access to the SMS service interface



Access to the Phonebook interface



Set parameters

3. Status information:


Status	Description
New message	New message(s) arrived.
Message full	Indicates the (U)SIM's storage of SMS is full.
No device	Indicates that system cannot find the device.
Initializing	Indicates that the device is in the process of initializing.
Searching	The device is searching for the network.
No service	No suitable network.
No (U)SIM card	(U)SIM card not inserted or the device cannot recognized the (U)SIM.
Invalid (U)SIM card	The (U)SIM is out of service.
Network signal	Indicate the signal strength of the network.
Network type	GSM/GPRS, UMTS.
Data service	EDGE available, HSPA available.

INTERNET SERVICE

1. Connecting with the default connection profile

- Click  to set up the connection;

2. Connect to the internet with the user defined profile

- Click , select **Connection Profile**;
- Click **New**, fill in all the parameters, and then click **OK**;
- Click **Import**, Select one item from the list and click **OK**.

Note: Contact with your service provider to get the correct parameters.

3. Statistics information

The following window will be displayed at lower right corner of main interface when connecting to the internet.



4. Disconnect from the internet

Click  to disconnect the internet connection.

SMS SERVICE

Click  to enter SMS (Short Message Service) service interface.

1. Creating and sending a message




Click .

- Input the recipient number by one of the following options:
 - ✧ Enter the number directly;
 - ✧ Click **Send to**, choose the recipient number from the phonebook and add to the sending list, then click **OK**.
- Enter the message content;
- Click **Send** or **Save to Draft**. The message will be saved in the **Draft** when failed to send.

Note:

- You can group send a message at most 20 recipients;
- Each number should be separated by “,”;
- The message can expand up to 2048 characters.

2. Inbox

- Reply : Access the edit interface, write the content, click **Send** or **Save to Draft**;
- Forward : Forward the selected message;
- Delete : Delete the selected message.

Note:

- You can use “Shift” or “Ctrl” to selected several messages;

3. Outbox

The message in the **Outbox** can be deleted or forwarded.

4. Draft

- The MSG sent unsuccessfully will be saved in the **Draft**;
- Click the selected message;
- Confirm the recipient and the content, and click **Send** or **Save to Draft**.

5. Recycle

All deleted information will be saved in the Recycle. ●

6. The selected SMS can be operated as follows:

- Delete text message

To delete the selected message.

- Move to

To move the selected message to Outbox or Draft.

- Copy to

To cope the selected message to Outbox or Draft.

- SMS Export


- Right-click the selected the message;
- Click *SMS Export*;
- Specify the path and the file name, click *Save*.

Note: The exported message will be saved as a *.csv file.



CONTACTS

Click  to enter Contacts interface.




1. New

- Click ;
- Enter the Name and Mobile, save it in the (U)SIM card or PC.

2. Searching a contact

- Click ;
- Enter the key characters of you want to find in the ;
- The result will be displayed in turn.

3. Viewing a contact

- Click **Local** or **(U)SIM** to display the contacts interface accordingly;
- Select a contact, then you can operate as follows:
 - ✧ Edit : Modify the selected contact;
 - ✧ Delete : Delete the selected contact;
 - ✧ Send SMS : Send a message to the selected contact;
 - ✧ Copy to: Copy the contact between (U)SIM card and PC.

Note: The deleted contact information cannot be retrieved.

4. Import

- Right-click the mouse;
- Click **Contacts Import**;
- Select the *.vcf or *.csv file and click **Open**;
- The import file will be saved in the current interface.

5. Export

- Right-click the selected contact;
- Click **Contacts Export**;
- You can save the contact file as *.csv file or *.vcf file;

Confirm the name and the path the file saved, then click **Save**.

SETTINGS

Click  to list the functions.

- PIN Management
- Enable PIN
 - Click *Enable PIN*;
 - Enter the correct PIN code and click **OK**.

Note: The PIN code should be a numeric string of 4-8 digits.

- Disable PIN
 - Click *Disable PIN*;
 - Enter the correct PIN code and click **OK**.
- Modify PIN
 - Click *Modify PIN*;
 - Enter the old PIN code and new PIN code, confirm the new PIN code and click **OK**.

1. Connection Profile

- General

You may choose the alert tone when connected/disconnected to the internet.

- Text Message Setting
 - You may activate the message alert tone, and also can set up your favorite tone via selecting a *.wav file in the PC.
 - The number showed in the SMS center is read from the (U)SIM card automatically; modification is not recommended;

Note: SMS would not work with the wrong SMSC. Contact with the service provider to get the correct SMSC.

- You may select the period in the drop-box, it specifies the validity which the message would save in the network;

Note: The validity setting of SMS should be supported by the network.

➤ Profile Management

For more details refer to INTERNET SERVICE section 2.

➤ Network

✧ Network Type

- You can choose *Auto* or *Only UMTS/HSPA* or *Only GPRS/EDGE*. The device will register network according to the selected mode.
- The default mode is *Auto*.

✧ Registration Mode

- *Auto search and register* is set as default value;
- Select *Manual search and register* before dialing, available networks will be listed when finished;
- Select an available network and click *Register*, and then the device will try to register.

2. Contacts Import

For more details refer to INTERNET CONTACTS section 4.

3. Contacts Export

For more details refer to INTERNET CONTACTS section 5.

4. SMS Export

For more details refer to SMS SERVICE section 6.

5. Help &About

- Help: To open the User Manual;
- About: To get the PC Suite software information.

6. Show Menu Bar

You can display the Menu Bar or not.

FAQS

- Q:** What shall I do if I cannot connect to the internet?
A: Open Settings->Connection Profile, confirm the APN information right or not. For more details, contact with your service provider.
- Q:** Why takes so long for installation?
A: According to the different hardware and software environment, it would take a few minutes for installation.
- Q:** Why can't I receive the message?
A: Please confirm whether the (U)SIM's SMS memory is full or not.
- Q:** Why can't I register to the internet?
A: Open Settings->Network Selection, check the network setting.
- Q:** Why the software doesn't run automatically when the device is plugged in?
A: Click My computer->data card disk->StartModem.exe. Or run the DCT tool from Start of the OS if DCT tool was installed.